

DATA SHEET

In-line SPD for High Frequency Coaxial & RF Systems

RayDat CP N-6G Series**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3
 Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA
 Max. Operating Voltage: 180 V
 Maximum Peak Power: 125 W
 Frequency Range: DC–6.0 GHz
 Impedance: 50 Ω
 Insertion Loss: < 0.4 dB
 Return Loss: > 20 dB
 Termination: N Type (F-F, M-F)
 Housing: Bulkhead Installation,
 Shielded Enclosure
 Compliance: IEC/EN 61643-21


**Technical Data**

CP N-6G	CP N-6G-FF	CP N-6G-MF
Electrical		
Maximum Continuous Operating Voltage	U_c	180 V
Maximum Peak Power	P_{max}	125 W
C2 Nominal Discharge Current (8/20 μ s)	I_n	10 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	20 kA
Residual Voltage at (1 kV/ μ s)	U_{res}	< 700 V
Impedance	Z	50 Ω
Insertion Loss	I_L	< 0.4 dB
Return Loss	R_L	> 20 dB
Insulation Resistance of Protection	R_{iso}	> 10 G Ω
Frequency Range	f_G	0–6.0 GHz
Mechanical		
Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]	
Connection	N Female/Female	N Male/Female
Degree of Protection IEC/EN 60529	IP 20 (built-in)	
Housing Material	Metal	
Order Information		
Order Code		
CP N-6G-XX	800 865	800 866



RayDat CP N-6G Series

Internal Configuration

Legend
 GDT Gas Discharge Tube
 PE Ground

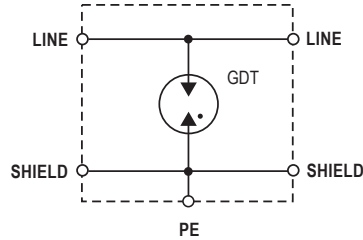

Dimensions & Packaging

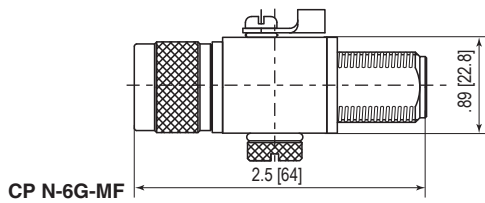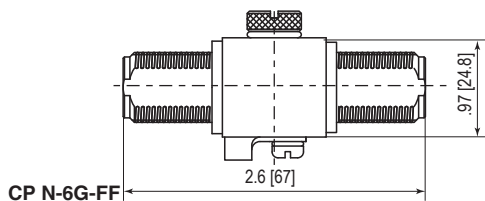

CP N-6G	CP N-6G-FF	CP N-6G-MF
Dimensions		
Weight per Unit	4.65 oz [132 g]	4.58 oz [130 g]
Packaging Dimensions (Single Unit)	2.9 x 1.2 x 1.2" [73 x 30 x 30 mm]	
Minimum Package Quantity	100 pieces	

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS
COMPLIANT  **CE**

Raycap

www.raycap.com

© 2020 Raycap All rights reserved.
G29-00-053 201120